9. Check the **Host Controller** firmware version.

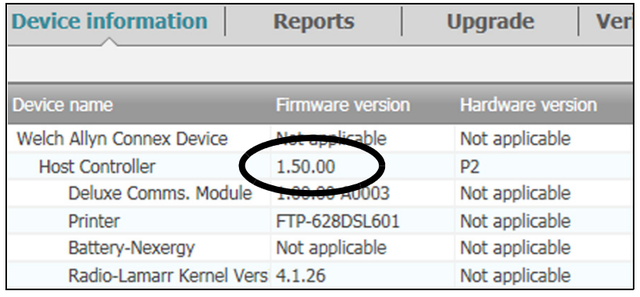

- **If the version is not 1.50.00 or later:** You must upgrade to the latest version.

  a. Upgrade the firmware by using the Welch Allyn Service Tool. For instructions, refer to the service-tool installation guide or the Help file in the service tool (**Help** > **Service Tool Help**).

  b. Install the dock using the instructions on the installation sheet that accompanies the dock or mounting kit.

- **If the version is 1.50.00 or later:** The monitor is compatible with the dock. Install the dock using the instructions on the installation sheet that accompanies the dock or mounting kit.

For more information about dock functionality, refer to the version of *Welch Allyn Connex Vital Signs Monitor 6000 Series Directions for Use* that applies to your firmware version. You can download the directions for use from http://www.welchallyn.com.

Welch Allyn Technical Support

USA	+1 800 535 6663 +1 315 685 4560	Japan	+81 42 703 6084
		Latin America	+1 305 669 9003
Australia	+61 2 9638 3000	Malaysia	+603 7875 3341
Canada	+1 800 561 8797	Netherlands	+31 202 061 360
China	+86 21 6327 9631	Singapore	+65 6419 8100
European Call Center	+353 46 90 67790	South Africa	+27 11 777 7555
France	+33 155 69 58 49	Spain	+34 917 499 357
Germany	+49 695 098 5132	Sweden	+46 85 853 6551
Italy	+39 026 968 2425	United Kingdom	+44 207 365 6780

Welch Allyn, Inc.
4341 State Street Road
Skaneateles Falls, NY 13153-0220 USA
www.welchallyn.com

© 2011 Welch Allyn

READ THIS FIRST!

The Braun PRO 4000 Dock works only with **firmware version 1.50.00 or later** on Connex Vital Signs Monitor 6000 Series monitors. Older firmware on these monitors must be upgraded before the dock can be installed.

If your monitor part number is in the following list, you do not need to upgrade the monitor firmware. Install the dock using the instructions on the installation sheet that accompanies the dock or mounting kit.

If your monitor part number is **not** in the list, you must check the firmware version and then, if indicated, upgrade the firmware before installing the dock. This document shows how to check the firmware version on the monitor or through the Welch Allyn Service Tool. Choose the option that you prefer.

Part numbers of compatible monitors:

63XXXE	64XXXE	65XXXE
63MXXE	64MXXE	65MXXE
63NXXE	64NXXE	65NXXE
63XTXE	64XTXE	65XTXE
63XTPE	64XTPE	65XTPE
63MTXE	64MTXE	65MTXE
63NTXE	64NTXE	65NTXE
63MTPE	64MTPE	65MTPE
63NTPE	64NTPE	65NTPE
63XXPE	64XXPE	65XXPE
63NXPE	64NXPE	65NXPE
63MXPE	64MXPE	65MXPE
	64HXXX	65HXXX
	64HXPX	65HXPX
	64HTXX	65HTXX
	64HTPX	65HTPX
	64HXXE	65HXXE
	64HXPE	65HXPE

Option 1—Check the firmware version on the monitor

1. If the monitor is not already on, power it on.
2. Touch the **Settings** tab.
3. Touch the **Advanced** tab.
4. In the right pane, check the number under **Software version**.

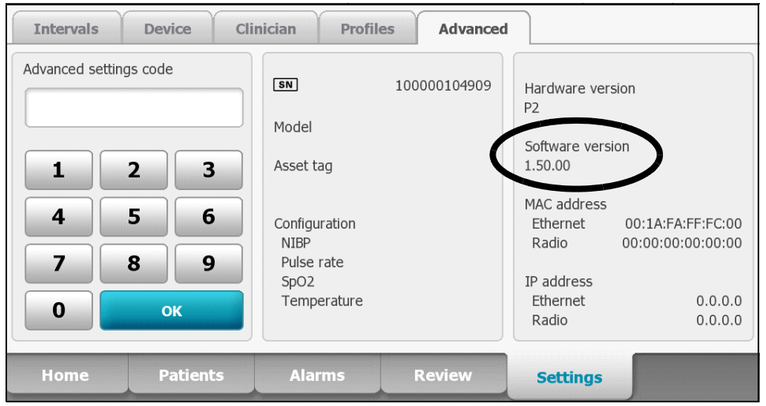

- **If the version is not 1.50.00 or later:** You must upgrade to the latest version.

  a. Upgrade the firmware by using the Welch Allyn Service Tool. For instructions, refer to the service-tool installation guide or the Help file in the service tool (**Help** > **Service Tool Help**).

  Note To acquire the service tool, contact Welch Allyn Technical Support or download it from http://www.welchallyn.com/promotions/services/servicetool.htm.

  b. Install the dock using the instructions on the installation sheet that accompanies the dock or mounting kit.

- **If the version is 1.50.00 or later:** The monitor is compatible with the dock. Install the dock using the instructions on the installation sheet that accompanies the dock or mounting kit.

For more information about dock functionality, refer to the version of *Welch Allyn Connex Vital Signs Monitor 6000 Series Directions for Use* that applies to your firmware version. You can download the directions for use from http://www.welchallyn.com.

Option 2—Use the Welch Allyn Service Tool to check the firmware version

Required equipment

- Computer with Internet access and the service tool installed
- Monitor
- USB 2.0/5-pin Mini-B cable, gold, 6 feet

To check the firmware version

1. If the monitor is not already on, power it on.
2. Connect the USB cable to the Mini-B port on the monitor and to the computer.
3. On the computer, start the service tool by double-clicking the Welch Allyn Service Tool icon.
4. If the Welch Allyn screen appears, click **Service**.
5. If prompted, log on with your user ID and password. (Alternatively, you can log on with ADMIN as the user ID and leave the password field blank.)

   The Device list page appears.

6. Confirm that the monitor name appears with a green square next to it.

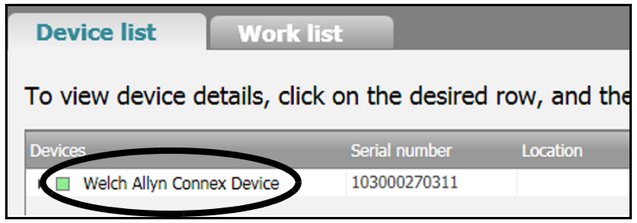

Note If the square is gray or the monitor name does not appear, cycle device power. If this does not solve the problem, contact Welch Allyn Technical Support.

7. Click the row to highlight it.

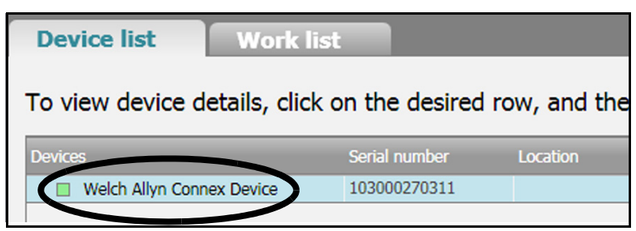

8. Click **Select**.

   The Device information tab appears.